查询LP2283F140LC01供应商

CIT RELAY & SWITCH
A Division of Circuit Interruption Technology, Inc.

LP2283

SPECIFICATIONS

Electrical Ratings	100mA @ 30VDC
Electrical Life	100,000 cycles typical
Contact Resistance	< 50 mΩ initial
Actuation Force	140 +/- 50gF
Actuator Travel	1.0 mm to lock 1.8 mm full travel
Dielectric Strength	1000Vrms min
Insulation Resistance	> 100MΩ min
Operating Temperature Storage Temperature	-40°C to 85°C -40°C to 85°C

MATERIALS ←RoHS COMPLIANT

Actuator	PBT
Housing	PBT
Cover	PBT
Latching Pin	Stainless Steel
Spring	Stainless Steel
Contacts	Phosphor Bronze, Silver Plated
Terminals	Brass, Silver Plated

ORDERING INFORMATION

1. Series:	**LP2283**	**F140**	**N**
LP2283			
2. Actuation Force:			
F140 = 140gF			
3. Latching:			
N = Non-latching			
L = Latching			
4. Cap Options:	**Cap Colors:**		
Blank = No Cap			
C01	****See Cap Options for color availability**		
C02			
C03			
C04			
C05			

DIMENSIONS

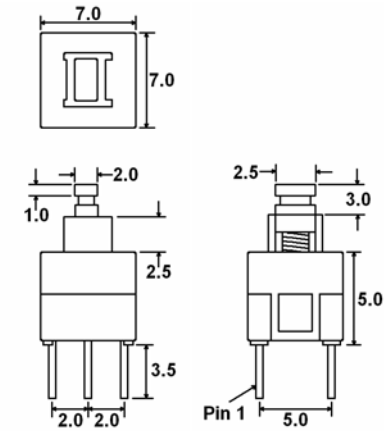

SCHEMATIC & PC LAYOUT

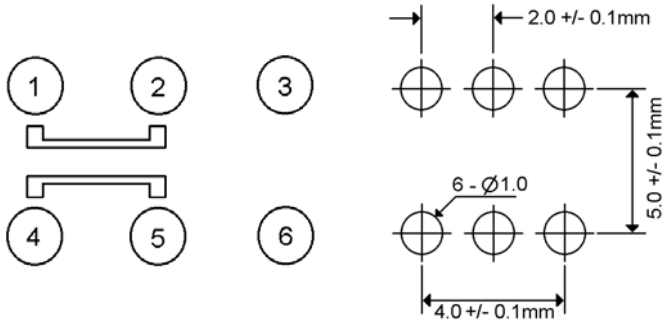

CAP OPTIONS

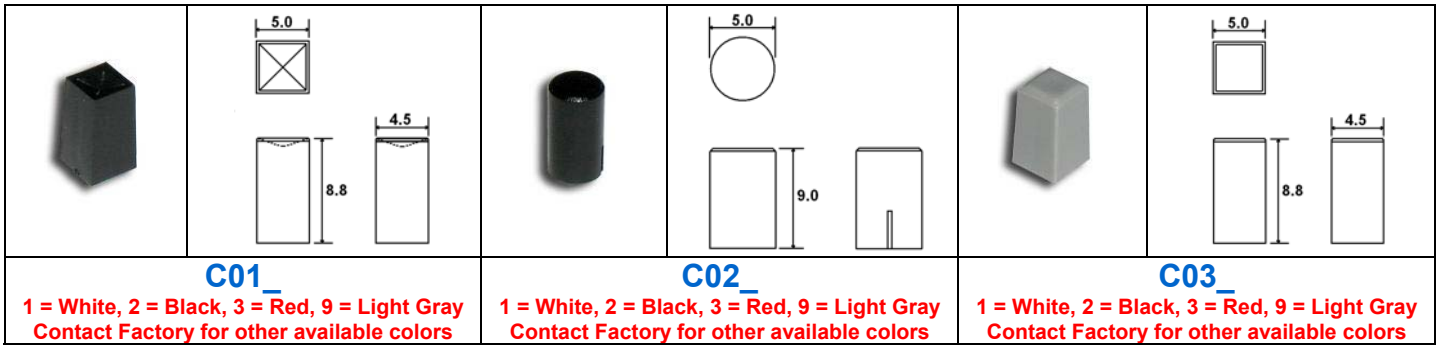

C01_
1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

C02_
1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

C03_
1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

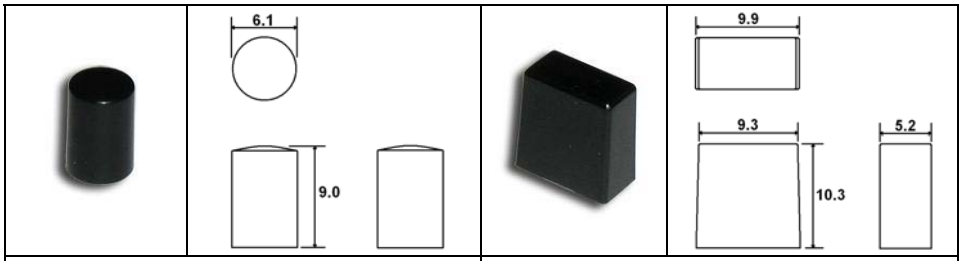

C04_
1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors

C05_
1 = White, 2 = Black, 3 = Red, 9 = Light Gray
Contact Factory for other available colors